



PT. UNITED EQUIPMENT INDONESIA



PROVEN PRODUCT | PROVEN SERVICES

Dynapac CA610D

Single drum vibratory rollers



Dynapac CA610D

Single drum vibratory rollers



Technical data



Masses

Operating mass (incl. ROPS)	20700 kg
Module mass (front/rear)	14050 kg/6650 kg
Max. operating mass	21000 kg



Dimensions

Drum width	2130 mm
Length	6180 mm
Width	2400 mm



Traction

Speed range (Dual/TC/AS)	0-11 km/h
Tyre size (8 ply)	23,1x26
Theor. gradeability	43 %
Vertical oscillation	±9°



Compaction

Static linear load	66 kg/cm
Nominal amplitude (high/low)	1.8 mm/1.1 mm
Vibration frequency (high/low amplitude)	29 Hz/31 Hz
Centrifugal force (high/low amplitude)	317 kN/231 kN



Engine

Manufacturer/Model	Cummins 6BTAA5.9-C170 (Tier 2)
Type	Water cooled turbo Diesel
Rated power, SAE J1995	127 kW (170 hp) @ 2200 rpm
Fuel tank capacity	320 l





Engine

Manufacturer/Model	Cummins QSB6.7-C173 (Tier 3)
Type	Water cooled turbo Diesel
Rated power, SAE J1995	129 kW (173 hp) @ 2200 rpm



Hydraulic system

Driving	Axial piston pump with variable displacement. Axial piston motors with constant displacement.
Vibration	Axial piston pump with variable displacement. Axial piston motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.

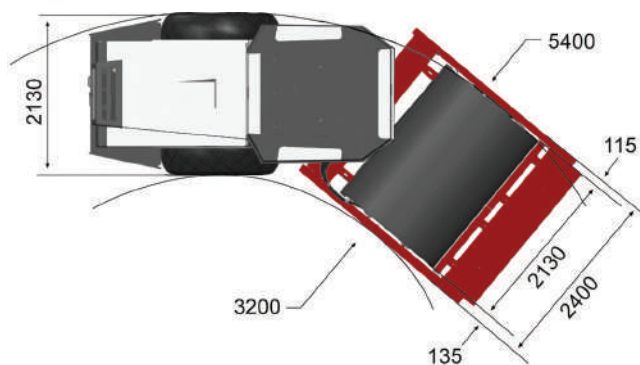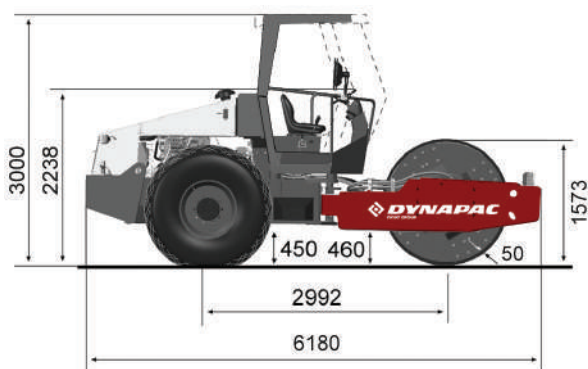

UniQCALL
1500 163

UniQUIP > unicall@uniquip.co.id

OFFICE & WORKSHOP

☉ JL. Raya Cakung Cilincing
Kav. 203 Jakarta Timur,
13910, Indonesia,
Hotline :
☉ : 0812 8813 6222
☉ : (021) 4683 3232
☉ : (021) 461 5466

BRANCH OFFICES

BALI : 0813 5325 4212
BALIKPAPAN : 0851 0022 3322
MAKASSAR : 0852 9877 2510
MANADO : 0812 4158 6699
PALEMBANG : 0851 0132 9222
PONTIANAK : 0812 8742 9778
SEMARANG : 0812 1631 0676

BANJARMASIN : 0811 5569 222
KENDARI : 0852 1999 4707
MATARAM : 0813 5372 4432
MEDAN : 0821 6683 3222
PEKANBARU : 0852 7651 4222
SAMARINDA : 0813 5167 2528
SURABAYA : 0813 3671 1899